


2 - Designation

Designation code

R 2I 320 U P 2 D - 10,3 B3
MR C2I 200 U O 2 V - 48 x 350 - 35,3 V5 HB3 180L4 400-50 B5 TB3

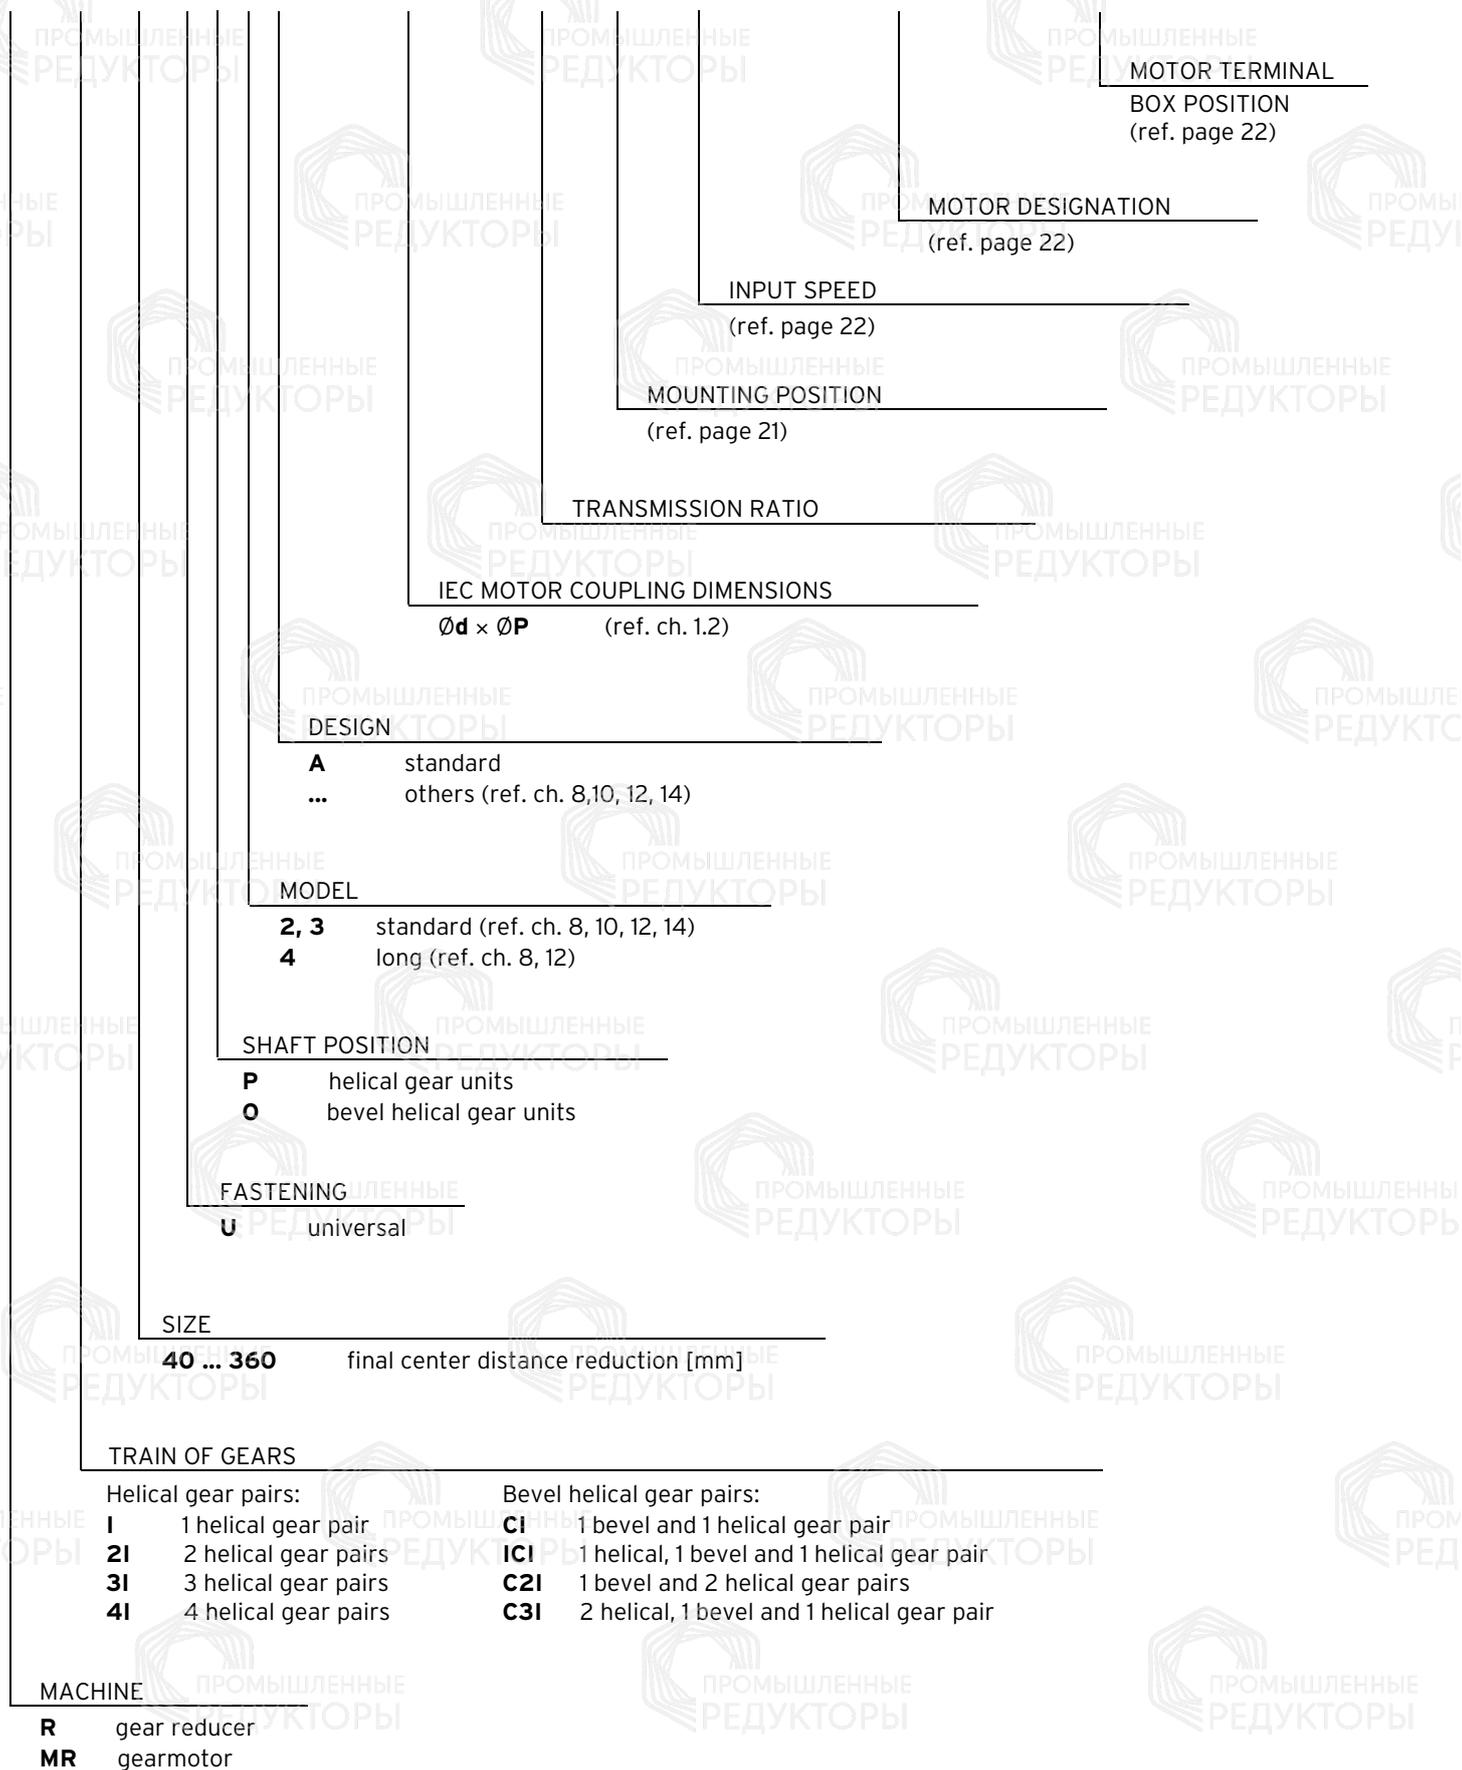

Note: For ATEX environment see details at chapter 17(37).